

# UNIQUE

**TWIST**

**CLICK**

**LOCK**

Simple to install with the innovative 'Twist, Click & Lock' mechanism. The TF1 Total Filter is supplied complete so no need for additional parts or fittings.

1. Using a flat end screwdriver in the recess shown, gently lever the locking clip into the 'unlock' position.



2. Pull the inlet/outlet port approximately 3mm away from the body to allow rotation to the required position.



3. Push the inlet/outlet port back towards the body of the unit to prevent further rotation.



4. Push the locking clip securely back into the 'lock' position.



# INNOVATIVE Filter Fluid+ Protector

## What is Filter Fluid+ Protector?

An innovative inhibitor and dispersant package that detects and delivers sludge and debris to any system filter.

- Protects the system against corrosion and scale formation
- Perfect partner to the TF1 Filter range
- Increases the effectiveness of any filter
- Maximises the ongoing cleaning process by delivering any remaining system debris to a filter



Smart intuitive  
technology



Award-winning design  
**TF1 TOTAL FILTER**

0216USV01-102

## A NAME YOU CAN TRUST

Extensive technical research and customer feedback has led to the development of the improved Fernox **TF1 Total Filter**.

The **TF1 Total Filter** offers installers the complete solution.



Hydrocyclonic action and specially designed magnet assemblies to remove, trap and contain both magnetic and non-magnetic debris



Award-winning technology



Quick and easy to install – saving time on-site



'Twist, click & lock' technology makes installation even easier – no 'O' rings, 1" sweat valve available



Cleaned in seconds – with no need to dismantle the filter




Supplied with best quality valves as standard

## TF1 TOTAL FILTER



## CLEANING THE TF1 TOTAL FILTER

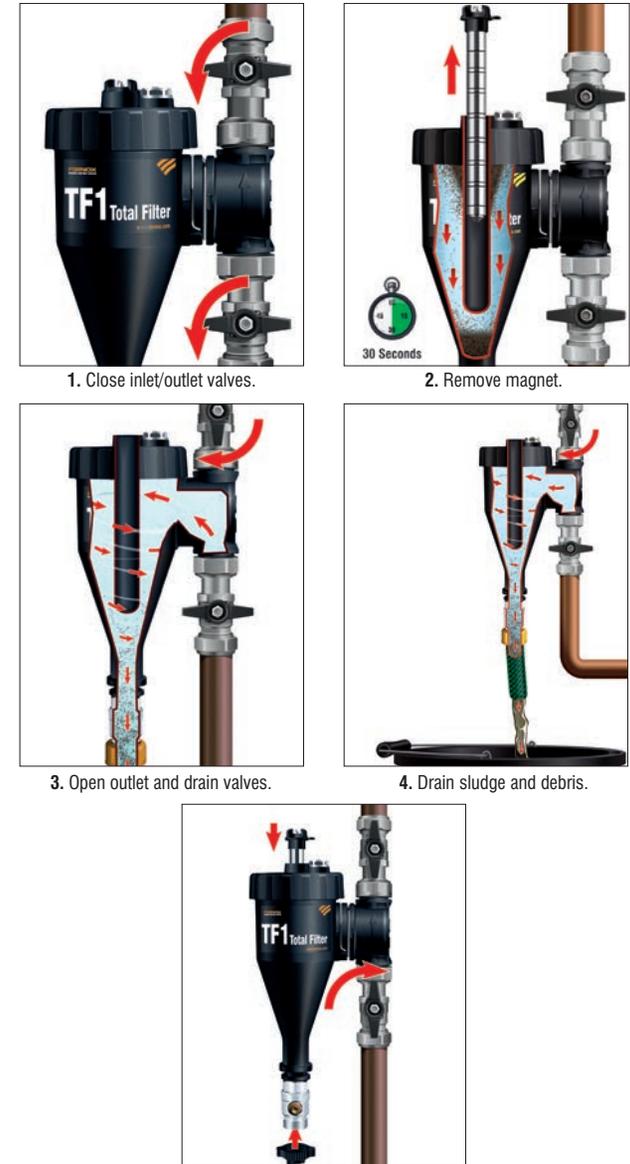

**No need to remove lid collar to clean the filter.**